



GLASS CLAMPS

Oversized Fixed Panel U-Clamp Cat. No.UC79





Specifications:

Material: Solid brass

Glass Thickness Range: 5/16" (8mm) to 1/2" (12mm) Hole Size Required: 5/8" (16mm) or 3/4" (19mm)


Includes: Mounting screws and gaskets
Note: An additional set of gaskets is
required for 5/16" (8mm) glass

Template Shown on Next Page

GLASS CLAMPS

Cathedral Style Fixed Panel Clamp
CAT. No. GCB279

1-3/4" (44mm) 2-1/8" (54mm) FRONT VIEW



Specifications:

Material: Solid brass

Glass Thickness Range: 5/16" (8mm) to 1/2" (12mm) Hole Size Required: 5/8" (16mm) or 3/4" (19mm)


Includes: Mounting screws and gaskets **Note:** An additional set of gaskets is required for 5/16" (8mm) glass

Template Shown on Next Page

GLASS CLAMPS

Junior Cathedral Fixed Panel Clamp Cat. No.GCB6279

1-3/4" (44mm) 2-1/8" (54mm) FRONT VIEW



REAR VIEW

Specifications:

Material: Solid brass

Glass Thickness: 1/4" (6mm)

Hole Size Required: 5/8" (16mm) or 3/4" (19mm)


Includes: Mounting screws and gaskets

Template Shown on Next Page

4X-3



Typical Installation

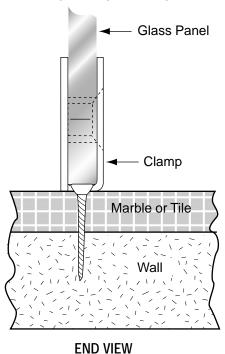

THE TEMPLATE ON THIS PAGE APPLIES TO CLAMPS BELOW:

Oversized Fixed Panel U-Clamp


CAT.No.UC79

Cathedral Style Fixed Panel Clamp

Cat.No.GCB279


Junior Cathedral Style Fixed Panel Clamp

Cat.No.GCB6279



TEMPLATE

Important: Project measurements from the edge of the glass.

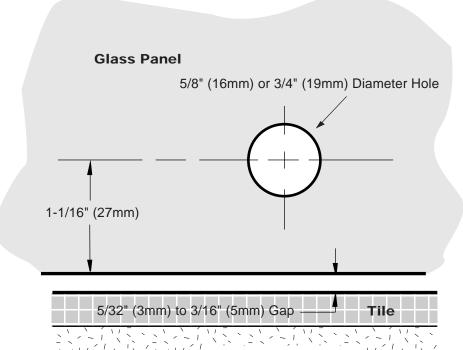

Wall, Floor or Ceiling