



Specifications:

Material: Solid brass

Glass Thickness Range: 3/8" (10mm) to 1/2" (12mm) Template Required: 5/8" (16mm) or 3/4" (19mm) hole for fixed panel, notch for transom Includes: Mounting screws and gaskets

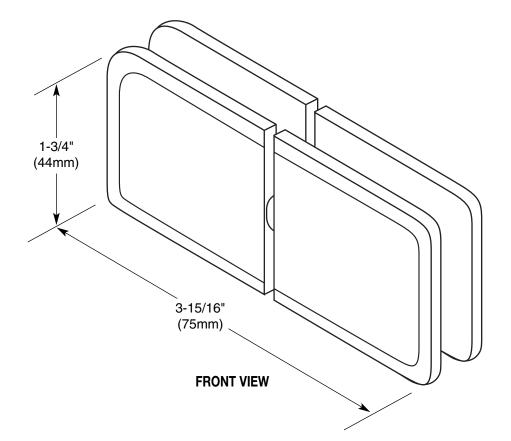

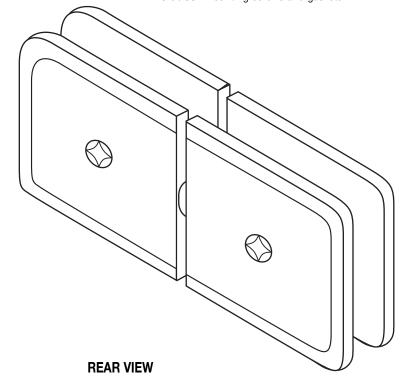

GLASS CLAMPS Glass-to-Glass Mount Movable Transom Clamp CAT. No. BGC188 BEVELED


Template Shown on Next Page



TYPICAL INSTALLATION

Template for Fixed Glass Panel to Movable Transom Glass

Important: Project measurements from the edge of glass.

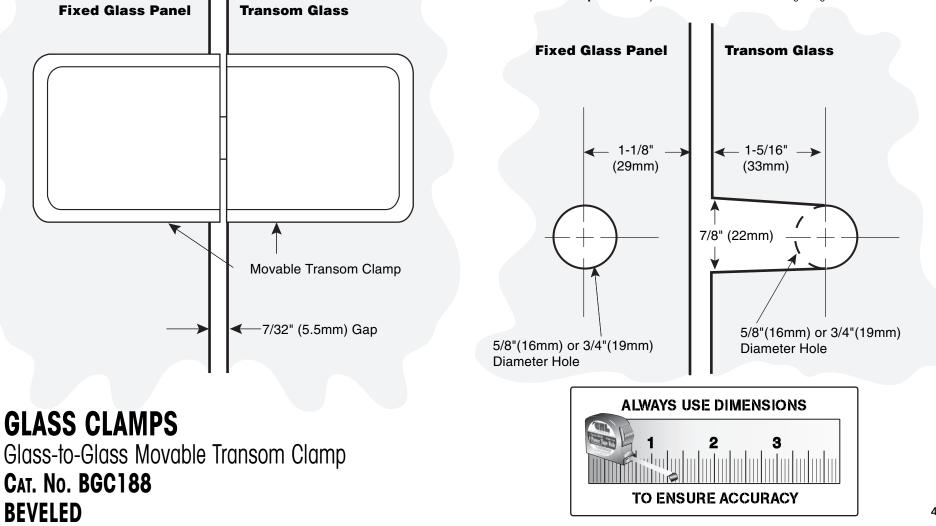

C.R. Laurence Co., Inc. crlaurence.com For technical assistance in the United States call toll free (800) 421-6144; from Canada call toll free (877) 421-6144; Outside the U.S. and Canada call (323) 588-1281. Ask for Tech Sales at Extension 7740. Toll free fax (800) 587-7501.

4X-42

© Copyright 2004, C.R. Laurence Co., Inc.