




C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

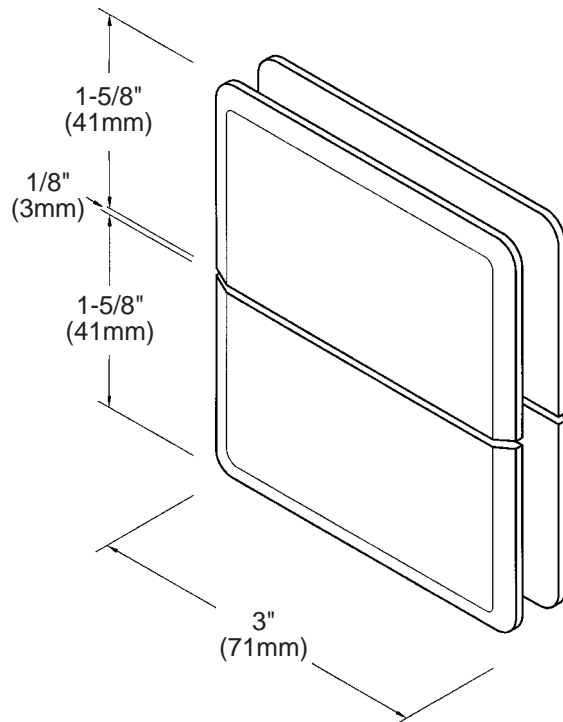

JUNIOR PRIMA

Glass-to-Glass Hinge

CAT No. JRPPH02

Edge Mount Option (full leg) 1/8" (3mm) clearance
Edge Mount Option (short leg) 1/8" (3mm) clearance
Inset Mount Option 1/8" (3mm) clearance

*Maximum Door Capacities	1/4" (6mm) Glass Weight	Width
Using 2 Hinges	62 lbs.(28 kg)	28"(711mm)

***NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.

Important Information:

Template Options: The Glass-to-Glass Mount JRPPH02 Hinge offers numerous choices of templates. If using an Edge Mount Template, the capabilities of your temperer may determine your choice of Full Leg or Short Leg Methods. The Full Leg Method has a full leg cutout that allows a full lenght vertical seal on the hinge side. The Short Leg Method has a short leg cutout, resulting in an interrupted seal.

The Inset Mount Template is beneficial for two reasons. It allows a full length vertical seal. Also, by insetting the hinge a certain distance towards the center of the door, it enables the door to avoid hitting a towel bar, or some other protrusion from the wall.

Optional Pivot Pins: Optional 5" Pivot Pins (Cat. No. JRP1VP1N) are sold as a set, one pin for the top hinge and one pin for the bottom hinge. These 5" offset Pivot Pins allow the installer to adjust the closing position of the door 5" inwards or outwards.

Specifications:

Glass Sizes: 1/4" (6mm) thick tempered safety glass

Construction: Solid brass

Closing Type: Self-centering when within 15° of closed position

Cutout Required

Includes: Gaskets, screws and template

Use of Gaskets:

For 1/4" (6mm) Glass: Use one thick gasket on each side

Recommendations:

For public safety, we recommend the use of only tempered safety glass.
Do not use power tools when installing these hinges.

Maintenance Guidelines:

- Never use an abrasive cleaner on the hardware. Many of the components are coated with a clear lacquer that will be irreparably damaged if subjected to harsh, abrasive chemicals. Advise your customer that drying the hardware with a clean, soft towel on a daily basis is the best way to maintain the hardware. If mineral deposits build-up, mix a couple of drops of a mild liquid soap (such as Ivory or a similar product) into a cup of warm water. Using a soft, non-abrasive cloth, clean the hardware. Rinse thoroughly with clean, warm water and dry.