


Specifications:

Material: Solid brass Glass Thickness Range: 3/8" (10 mm) to 1/2" (12mm) thick glass Hole Size Required: 5/8" (16mm) or 3/4" (19mm) diameter **Includes:** Mounting Screws and Gaskets **Templates Shown on Next Page**

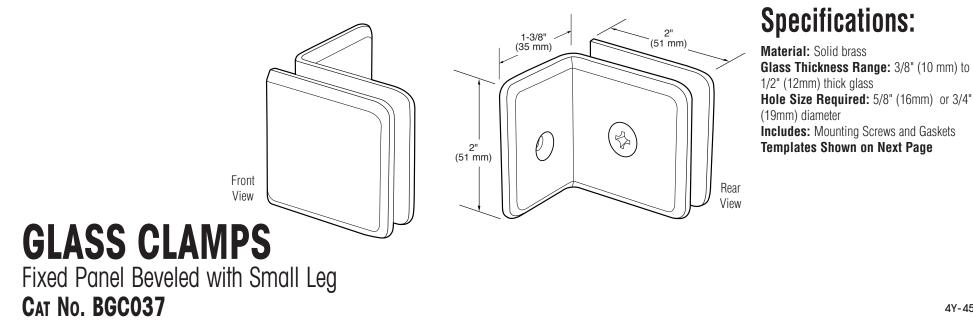


C.R. Laurence Co., Inc. crlaurence.com For technical assistance in the United States call toll free (800) 421-6144; from Canada call toll free (877) 421-6144; Outside the U.S. and Canada call (323) 588-1281. Ask for Tech Sales at Extension 7740. Toll free fax (800) 587-7501.

© Copyright 2009, C.R. Laurence Co., Inc_SDT21_U5



Typical Installation

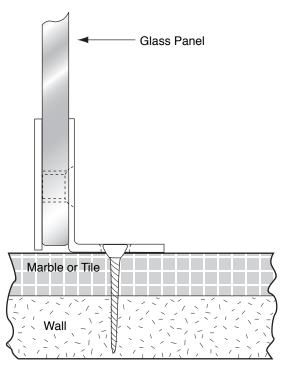

GLASS CLAMPS THE TEMPLATE ON THIS PAGE APPLIES TO THE FOLLOWING CLAMPS: Fixed Panel Square with Small Leg CAT. No. SGC037 Fixed Panel Beveled with Small Leg CAT. No. BGC037

ALWAYS USE DIMENSIONS

TEMPLATE

Important: Project measurements from the edge of the glass.

5/8" (16mm) or 3/4" (19mm) Diameter Hole

Wall, Floor or Ceiling

1/16" (1.5mm)

Glass Panel

15/16" (24mm)

Tile

4Y- 46

C.R. Laurence Co., Inc. crlaurence.com For technical assistance in the United States call toll free (800) 421-6144; from Canada call toll free (877) 421-6144; Outside the U.S. and Canada call (323) 588-1281. Ask for Tech Sales at Extension 7740. Toll free fax (800) 458-7496.

© Copyright 2009, C.R. Laurence Co., Inc_SDT21_U5.